




Mounting: recessed into ceiling	LED: COB	LED driver: remote	Areas of use:
Housing: aluminum	CRI: Ra>90 (±3000k)	Volt AC: 220-240V	indoors:
Diffuser:	CCT:	Frequency: 50-60Hz	public/private/residential
PMMA Lens	CT27-2700k	LED driver options:	show-rooms
Trim color options:	CT30-3000k	ND - non-dimmable	hotels
01-white matte		PH - phase dimmable	offices
11-black matte		010V - 0-10V dimmable	
* other RAL colors available on request		DALI - compatible	
3 years warranty F RoHS III CE IP20			

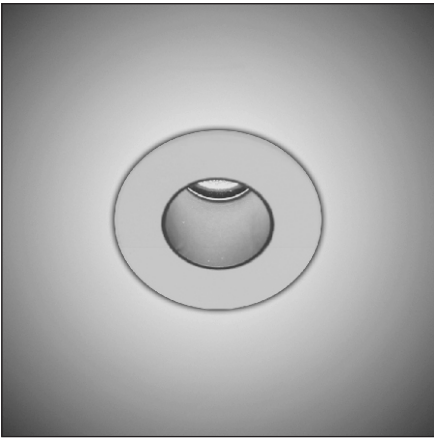

Ref Code	Watt	Lm	mA
03.05.141.01.1.2	1.2W	100	160
03.05.141.02.2.5	2.5W	160	350
03.05.141.03.03	3W	260	350

Beam Angle-Code:
25°-BA25
30°-BA30
38°-BA38
50°-BA50



Ref Code	Watt	Lm	mA
03.05.142.01.2.5	2.5W	160	350
03.05.142.02.03	3W	270	350

Beam Angle-Code:
20°-BA20
25°-BA25
50°-BA50