

Mounting:

- track mounted (TRK)
- surface mounted (SFM)

Housing:

die-cast aluminum

Fitting's finish options:

01-white matte

11-black matte

13-grey matte

Note:

* zoomable beam angle

LED: CREE

CRI: >90

CCT:

CT27-2700K

CT30-3000K

CT40-3000K

Note: *available with

2 wires single-circuit

3 wires single-circuit

4 wires three circuits

LED driver:

external remote

Volt DC: 36V

Frequency: 50/60Hz

LED driver options:

Smart IC Driver

DALI - compatible

Areas of use:

indoors:



public/private/residential

show-rooms

retail

hotels, etc.

Ambient Temp: -20°~+40°C



Ref Code

17.81.017.01.07

Watt

7W

Volt

36V

mA

160

Lm(±)

480


Note:

* Add the following abbreviation as necessary along with the order:


SFM - surface mounted on ceiling (without track)

TRK-2WR - track with 2 wires


TRK-3WR - track with 3 wires



optional accessories

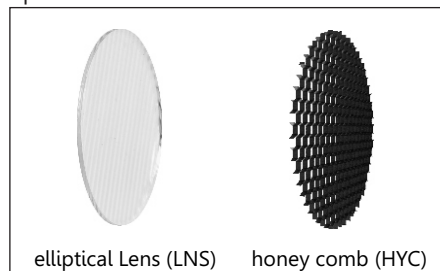


Zoomable beam angle: 15°~36°





h(m)	E(lx)	D(cm)
1	1649	23.59
2	412.2	47.17
3	183.2	70.76
4	103.1	94.34
5	65.95	121.2

Power : 7W Beam angle : 15°



Power : 7W Beam angle : 36°



Ref Code

17.81.018.01.09

Watt

9W

Volt


36V

mA


210

Lm(±)


550



optional accessories

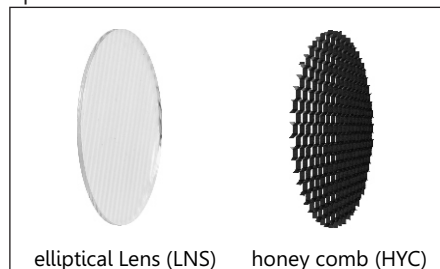


Zoomable beam angle: 10°~60°




h(m)	E(lx)	D(cm)
1	2423	24.24
2	605.9	48.48
3	269.3	72.72
4	151.5	96.96
5	97	121.2

Power : 9W Beam angle : 10°



Power : 9W Beam angle : 60°


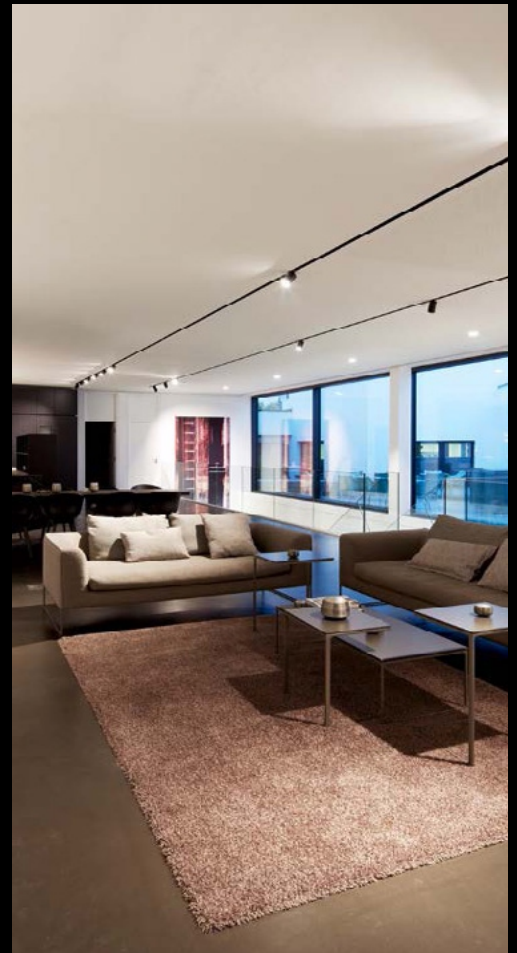


Mounting:
- track mounted (TRK)
- surface mounted (SFM)
Housing: die-cast aluminum
Fitting's finish options:
01-white matte
11-black matte
13-grey matte
Note:
* zoomable beam angle

LED: CREE
CRI: >90
CCT:
CT27-2700K
CT30-3000K
CT40-3000K
Note: *available with
2 wires single-circuit
3 wires single-circuit
4 wires three circuits

LED driver:
external remote
Volt DC: 36V
Frequency: 50/60Hz
LED driver options:
Smart IC Driver
DALI - compatible

Areas of use:
indoors:
public/private/residential
show-rooms
retail
hotels, etc.
Ambient Temp: -20°~+40°C

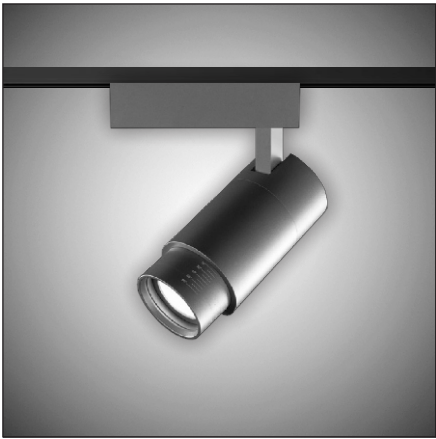


Ref Code	Watt	Volt	mA	Lm(±)	DiaxL
17.81.019.01.20	20W	36V	480	960	71x129
17.81.020.01.30	30W	36V	700	1450	83x157



Note:
* Add the following abbreviation as necessary along with the order:
SFM - surface mounted on ceiling (without track)
TRK-2WR - track with 2 wires
TRK-3WR - track with 3 wires
TRK-4WR - track with 4 wires



optional accessories

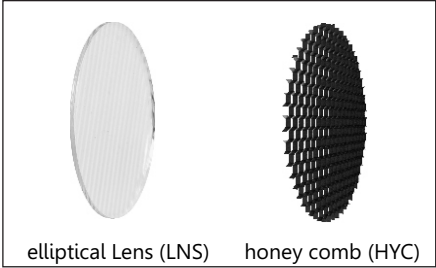

Zoomable beam angle: 10°~60°

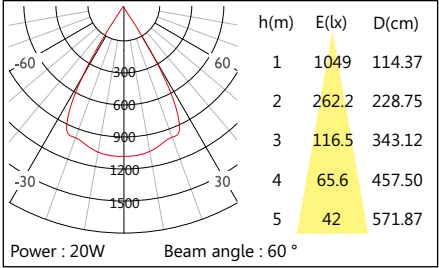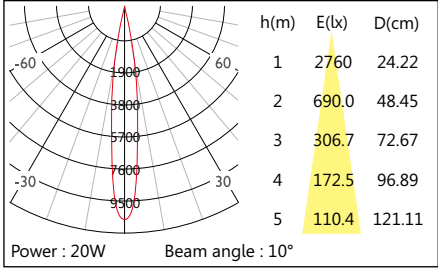

Mounting:

- track mounted (TRK)
- surface mounted (SFM)

Housing: die-cast aluminum

Fitting's finish options:

- 01-white matte
- 11-black matte
- 13-grey matte

Note:

* zoomable beam angle

LED: CREE

CRI: >90

CCT:

CT27-2700K

CT30-3000K

CT40-3000K

Note: *available with

2 wires single-circuit

3 wires single-circuit

4 wires three circuits

LED driver:

external remote

Volt DC: 36V

Frequency: 50/60Hz

LED driver options:

Smart IC Driver



DALI - compatible

Areas of use:

indoors:

- public/private/residential
- show-rooms
- retail
- hotels, etc.

Ambient Temp: -20°~+40°C



Ref Code

17.81.021.01.09

Watt

9W

Volt

36V

mA

210

Lm(±)

530

Note:


* Add the following abbreviation as necessary along with the order:

SFM - surface mounted on ceiling (without track)


TRK-2WR - track with 2 wires

TRK-3WR - track with 3 wires




TRK-4WR - track with 4 wires



optional accessories

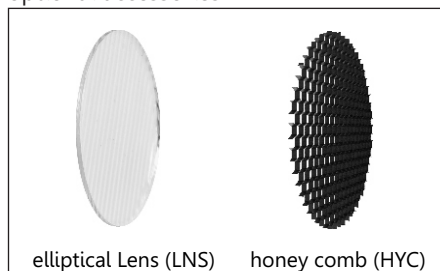

Zoomable beam angle: 15°~45°

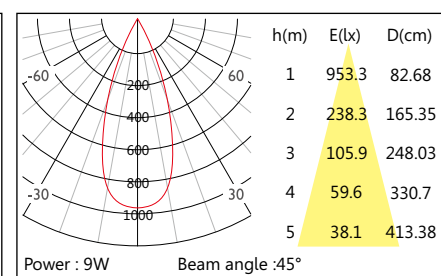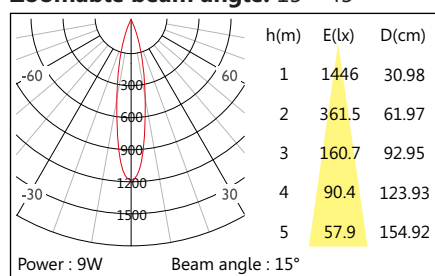

Ref Code

17.81.022.01.20

17.81.023.01.30

Watt

20W

30W

Volt

36V

36V

mA

480

700

Lm(±)

1100

1800

DiaxL

71x150

83x175

Note:


* Add the following abbreviation as necessary along with the order:

SFM - surface mounted on ceiling (without track)


TRK-2WR - track with 2 wires

TRK-3WR - track with 3 wires

TRK-4WR - track with 4 wires



optional accessories

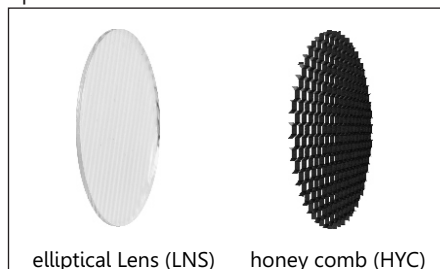

Zoomable beam angle: 15°~30°

