




Mounting:
recessed into ceiling
Housing: die-cast aluminum
Reflector: faceted pure aluminum
Diffuser: clear glass
Trim color options:
01-white matte
11-black matte
15-silver grey

LED: COB
(CREE/CITIZEN/SHARP)
CRI: Ra>80 (±3000k)
CCT:
CT27-2700k
CT30-3000K
CT40-4000k

LED driver: remote
Volt AC: 220-240V
Frequency: 50-60Hz
LED driver options:
ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible

Areas of use:
indoors:
public/private/residential
show-rooms
hotels
offices




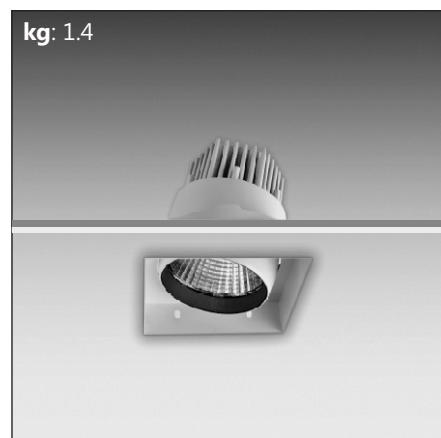


Ref Code	Watt	Lm	mA*
16.10.020.01.20	20W	1800	500
16.10.020.02.25	25W	2100	500
16.10.020.03.30	30W	3000	800
16.10.020.04.40	40W	3800	1050

Note: * mA data given is used with 36V driver

Beam Angle-Code:

15°-BA15
24°-BA24
36°-BA36
60°-BA60

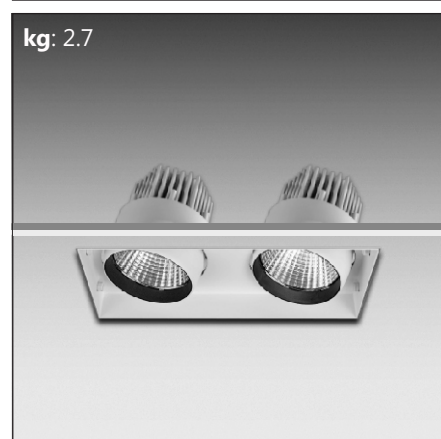
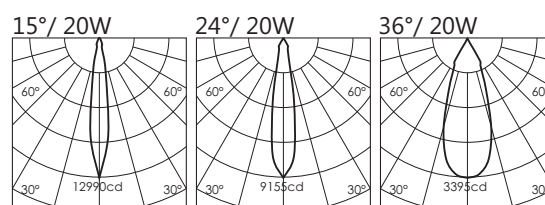


Ref Code	Watt	Lm	mA*
16.10.021.01.40	2x20W	3600	500
16.10.021.02.50	2x25W	4200	500
16.10.021.03.60	2x30W	6000	800
16.10.021.04.80	2x40W	7600	1050

Note: * mA data given is used with 36V driver

Beam Angle-Code:

15°-BA15
24°-BA24
36°-BA36
60°-BA60



Ref Code	Watt	Lm	mA*
16.10.022.01.60	3x20W	5400	500
16.10.022.02.75	3x25W	6300	500
16.10.022.03.90	3x30W	9000	800
16.10.022.04.120	3x40W	11400	1050

Note: * mA data given is used with 36V driver

Beam Angle-Code:

15°-BA15
24°-BA24
36°-BA36
60°-BA60

Mounting:
recessed into ceiling
Housing: die-cast aluminum
Reflector: faceted pure aluminum
Diffuser: clear glass
Trim color options:
01-white matte
11-black matte
15-silver grey



LED: COB
(CREE/CITIZEN/SHARP)
CRI: Ra>80 (±3000k)
CCT:
CT27-2700k
CT30-3000K
CT40-4000k

LED driver: remote
Volt AC: 220-240V
Frequency: 50-60Hz
LED driver options:
ND - non-dimmable
PH - phase dimmable
010V - 0-10V dimmable
DALI - compatible

Areas of use:
indoors:
public/private/residential
show-rooms
hotels
offices




N.W.: 1.5kg





Ref Code	Watt	mA	Lm(±)
16.10.023.01.20	20W	500	1800
16.10.023.02.25	25W	600	2100
16.10.023.03.30	30W	800	3000
16.10.023.04.40	40W	1050	3800

Beam Angle-Code:

15°-BA15
24°-BA24
36°-BA36
60°-BA60

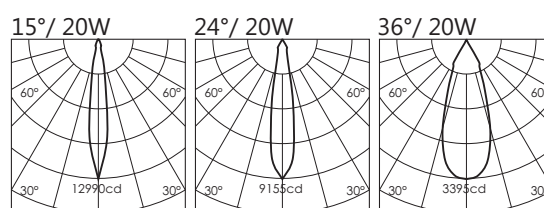

N.W.: 2.9kg





Ref Code	Watt	mA	Lm(±)
16.10.024.01.40	2x20W	500	3600
16.10.024.02.50	2x25W	600	4200
16.10.024.03.60	2x30W	800	6000
16.10.024.04.80	2x40W	1050	7600

Beam Angle-Code:

15°-BA15
25°-BA25
36°-BA36
60°-BA60



N.W.: 4.2kg



Ref Code	Watt	mA	Lm(±)
16.10.025.01.60	3x20W	500	5400
16.10.025.02.75	3x25W	600	6300
16.10.025.03.90	3x30W	800	9000
16.010.025.04.120	3x40W	1050	11400

Beam Angle-Code:

15°-BA15
25°-BA25
36°-BA36
60°-BA60