




Mounting: suspended (hanging), wall mounted, ground mounted Housing: extruded aluminum Diffuser: tempered glass, polycarbonate lense for LED Accessories: (optional) steel chain/cable Fitting's finish options: 11-black matte *other RAL colors available on request	LED: Phillips CRI: Ra>70-80 CCT: CT40-4000K CT50-5000K CT57-5700K Nominal efficacy: 130-140 lm/W Note: *Lm given in data is based on 4000K CCT	LED driver: Phillips Volt AC: 100-240V Frequency: 50/60Hz LED driver options: Motion sensor (MWS) PH - phase dimmable 010V - 0-10V dimmable DALI - compatible	Application: outdoors stadiums, airports, construction sites ware-houses, stores, gyms wide open areas Ambient Temp: -30°~+55°C
5 years warranty RoHS IK10 IP66			

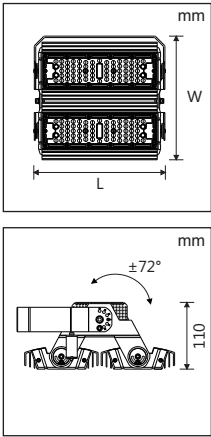


Ref Code	Watt	Lm(±)	LxW
33.34.076.01.100	100W	14000	275x258
33.34.076.02.150	150W	21000	275x373
33.34.077.01.200	200W	28000	544x258
33.34.077.02.300	300W	42000	544x373
33.34.078.01.400	400W	56000	755x373
33.34.078.02.450	450W	63000	755x373
33.34.078.03.600	600W	84000	755x516



adjustable






junction box

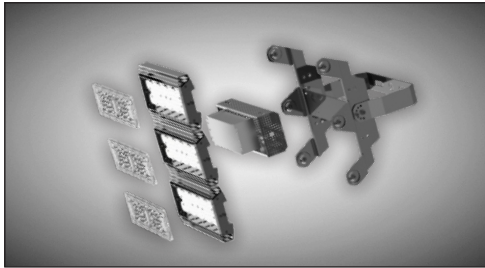




Beam Angle-Code:
symmetric
30°-BA30
60°-BA60
90°-BA90
asymmetric
80°x150°-BA80x150
90°x120°-BA90x120

Installation

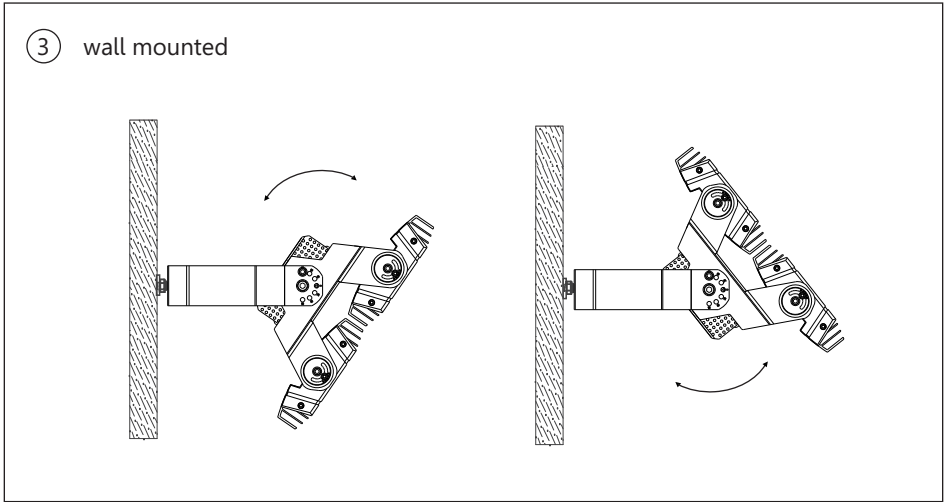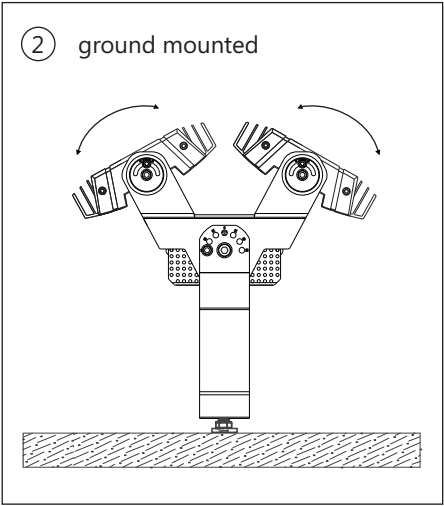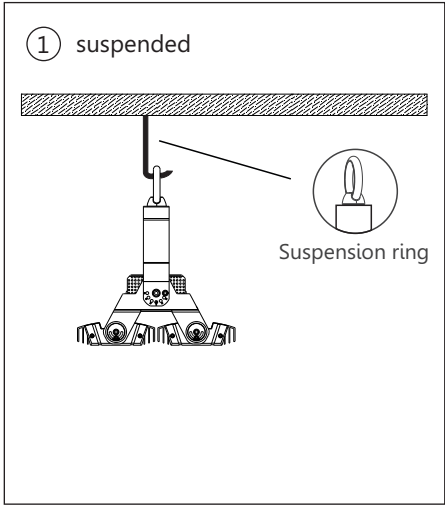


Mounting: suspended (hanging), wall mounted, ground mounted Housing: extruded aluminum Diffuser: tempered glass/polycarbonate Fitting's finish options: 11-black matte *other RAL colors available on request	LED: Phillips CRI: Ra>70-80 CCT: CT40-4000K CT50-5000K CT57-5700K Nominal efficacy: 130-140 lm/W Note: *Lm given in data is based on 4000K CCT	LED driver: Phillips Volt AC: 100-240V Frequency: 50/60Hz LED driver options: Motion sensor (MWS) PH - phase dimmable 010V - 0-10V dimmable DALI - compatible	Application: outdoors stadiums, airports, construction sites ware-houses, stores, gyms wide open areas Ambient Temp: -30°~+55°C
			5 years warranty RoHS CE IK10 IP66

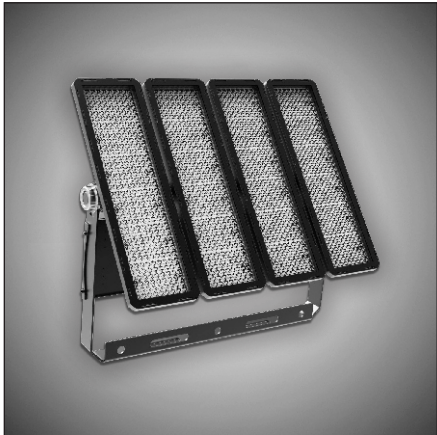




Ref Code	Watt	Lm(±)	L
33.34.079.01.500	500W	70000	470
33.34.080.01.750	750W	105000	670
33.34.081.01.1000	1000W	140000	875

Beam Angle-Code:
15°-BA15
30°-BA30




Adjustable angle




Detachable driver

Optional accessories

Stainless steel wireguard

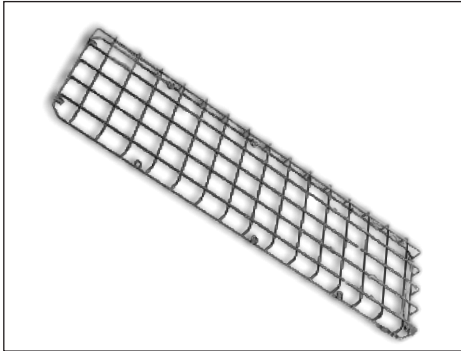


Junction box

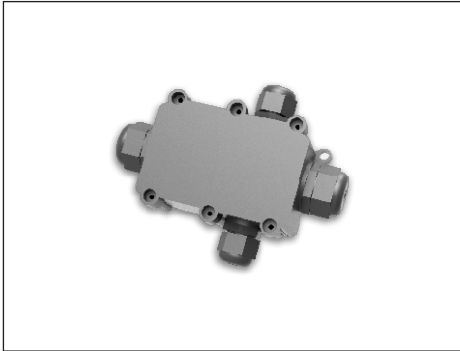


Stainless steel chain



Anti-glare cap (CAP)

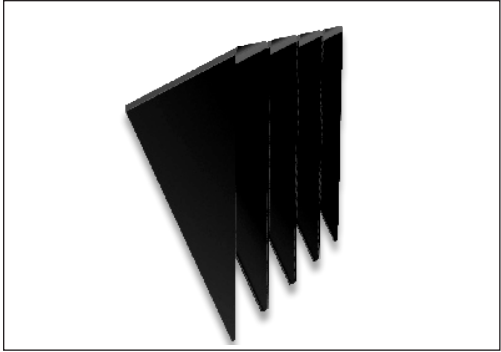



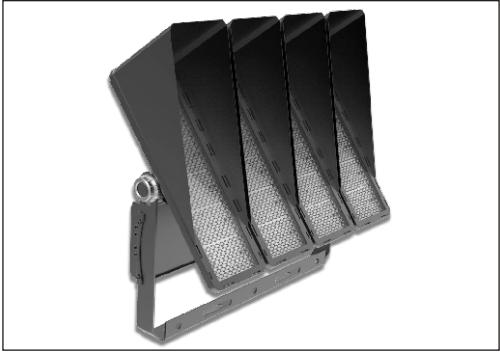

Precision aiming







